

Lexan* Resin EXL9330

Europe-Africa-Middle East: COMMERCIAL

Opaque PC-Siloxane copolymer with excellent processability. Non-chlorinated, non-brominated flame retardant product in most colors. UV-stabilized. UL rated f1/V-0/5VA.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 50 mm/min	58	MPa	ASTM D 638
Tensile Stress, brk, Type I, 50 mm/min	61	MPa	ASTM D 638
Tensile Strain, yld, Type I, 50 mm/min	6	%	ASTM D 638
Tensile Strain, brk, Type I, 50 mm/min	130	%	ASTM D 638
Tensile Modulus, 50 mm/min	2100	MPa	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	88	MPa	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	2060	MPa	ASTM D 790
Tensile Stress, yield, 50 mm/min	55	MPa	ISO 527
Tensile Stress, break, 50 mm/min	60	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	6	%	ISO 527
Tensile Strain, break, 50 mm/min	125	%	ISO 527
Tensile Modulus, 1 mm/min	2100	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	85	MPa	ISO 178
Flexural Modulus, 2 mm/min	2200	MPa	ISO 178
Hardness, H358/30	90	MPa	ISO 2039-1
IMPACT			
Izod Impact, notched, 23°C	801	J/m	ASTM D 256
Izod Impact, notched, -30°C	678	J/m	ASTM D 256
Izod Impact, notched, -50°C	587	J/m	ASTM D 256
Izod Impact, notched, 23°C, 6.4mm	640	J/m	ASTM D 256
Izod Impact, double-gated, 23°C	1068	J/m	SABIC Method
Instrumented Impact Total Energy, 23°C	52	J	ASTM D 3763

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

Lexan* Resin EXL9330

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
IMPACT			
Izod Impact, unnotched 80*10*3 +23°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*3 -30°C	NB	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*3 +23°C	70	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*3 -30°C	55	kJ/m ²	ISO 180/1A
Izod Impact, notched 63.5*12.7*3.2, 23°C	80	kJ/m ²	ISO 180/4A
Izod Impact, notched 63.5*12.7*3.2, -30°C	65	kJ/m ²	ISO 180/4A
Charpy 23°C, V-notch Edgew 80*10*3 sp=62mm	75	kJ/m ²	ISO 179/1eA
Charpy -30°C, V-notch Edgew 80*10*3 sp=62mm	60	kJ/m ²	ISO 179/1eA
Charpy 23°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m ²	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*3 sp=62mm	NB	kJ/m ²	ISO 179/1eU
THERMAL			
Vicat Softening Temp, Rate B/50	142	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	134	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	120	°C	ASTM D 648
HDT, 1.82 MPa, 6.4 mm, unannealed	124	°C	ASTM D 648
CTE, -40°C to 40°C, flow	6.66E-05	1/°C	ASTM E 831
CTE, -40°C to 40°C, xflow	6.66E-05	1/°C	ASTM E 831
CTE, 23°C to 80°C, flow	7.2E-05	1/°C	ISO 11359-2
CTE, 23°C to 80°C, xflow	7.7E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate B/50	140	°C	ISO 306
Vicat Softening Temp, Rate B/120	142	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	135	°C	ISO 75/Be
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	124	°C	ISO 75/Ae

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
 (3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.
 (4) Internal measurements according to UL standards.
 (5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011SABIC Innovative Plastics Holding BV.All rights reserved

Lexan* Resin EXL9330

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
Relative Temp Index, Elec	125	°C	UL 746B
Relative Temp Index, Mech w/impact	115	°C	UL 746B
Relative Temp Index, Mech w/o impact	120	°C	UL 746B
PHYSICAL			
Specific Gravity	1.18	-	ASTM D 792
Mold Shrinkage, flow, 3.2 mm (5)	0.4 - 0.8	%	SABIC Method
Mold Shrinkage, xflow, 3.2 mm (5)	0.4 - 0.8	%	SABIC Method
Melt Flow Rate, 300°C/1.2 kgf	10	g/10 min	ASTM D 1238
Density	1.19	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.35	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.15	%	ISO 62
Melt Volume Rate, MVR at 300°C/1.2 kg	9	cm ³ /10 min	ISO 1133
ELECTRICAL			
Dielectric Strength, in oil, 3.2 mm	17	kV/mm	ASTM D 149
Relative Permittivity, 50/60 Hz	2.95	-	ASTM D 150
Relative Permittivity, 1 MHz	2.9	-	ASTM D 150
Dissipation Factor, 50/60 Hz	0.0024	-	ASTM D 150
Dissipation Factor, 1 MHz	0.0085	-	ASTM D 150
Hot Wire Ignition {PLC}	1	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	0	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	3	PLC Code	UL 746A
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 3.2 mm	16	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.7	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.0085	-	IEC 60250
Comparative Tracking Index	225	V	IEC 60112

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.
(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given. SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

Lexan* Resin EXL9330

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
ELECTRICAL			
Relative Permittivity, 50/60 Hz	2.6	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	1.49	mm	UL 94
UL Recognized, 94-5VA Rating (3)	2.99	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	1	mm	IEC 60695-2-12
Glow Wire Ignitability Temperature, 1.0 mm	825	°C	IEC 60695-2-13
Oxygen Index (LOI)	35	%	ISO 4589
UV-light, water exposure/immersion	F1	-	UL 746C

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given. SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved

Lexan* Resin EXL9330

Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	120	°C
Drying Time	3 - 4	hrs
Drying Time (Cumulative)	48	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	295 - 315	°C
Nozzle Temperature	290 - 310	°C
Front - Zone 3 Temperature	295 - 315	°C
Middle - Zone 2 Temperature	280 - 305	°C
Rear - Zone 1 Temperature	215 - 295	°C
Mold Temperature	70 - 95	°C
Back Pressure	0.3 - 0.7	MPa
Screw Speed	40 - 70	rpm
Shot to Cylinder Size	40 - 60	%
Vent Depth	0.025 - 0.076	mm

• NOTE: Back Pressure, Screw Speed, Shot to Cylinder Size and Vent Depth are only mentioned as general guidelines. These may not apply or need adjustment in specific situations such as low shot sizes, thin wall molding and gas-assist molding.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given. SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011SABIC Innovative Plastics Holding BV.All rights reserved

Lexan® Resin EXL9330

Europe-Africa-Middle East: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

Lexan® EXL9330

Melt Temperature : 305°C

Mold Temperature : 80°C

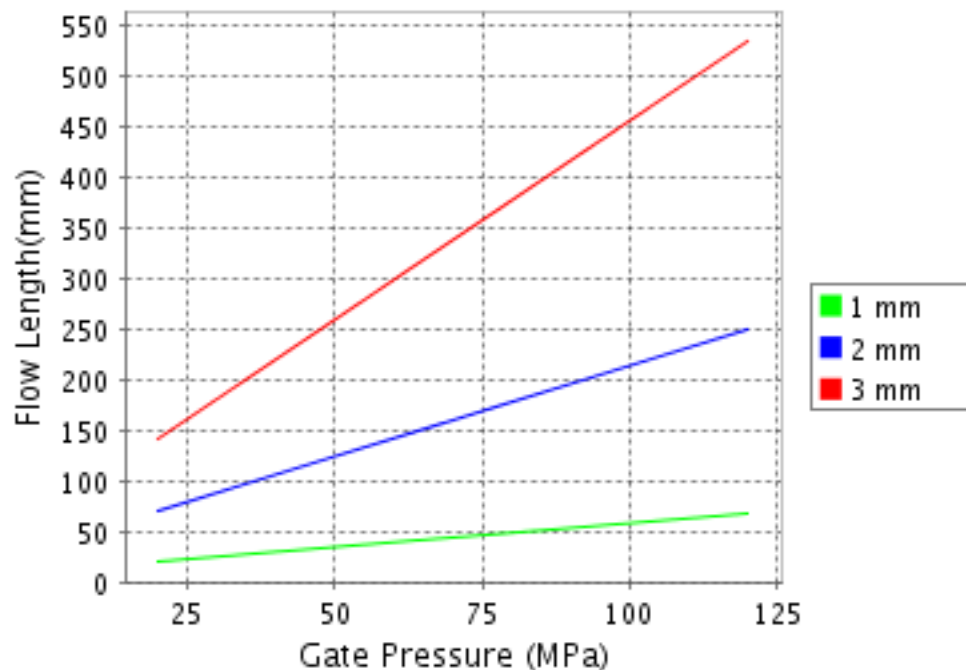

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

® Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23±176;C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Source GMD, last updated:

PLEASE CONTACT YOUR LOCAL SALES OFFICE FOR AVAILABILITY IN YOUR AREA All information, recommendation or advice given SABIC INNOVATIVE PLASTICS HOLDING BV, or any of its subsidiaries, affiliates or authorized representatives, whether written or oral, is given in good faith, to the best of its knowledge and based on current procedures in effect. Each user of the products shall convince himself, through all available sources (including finished product testing in its appropriate environment) of the suitability of the products supplied for its own particular purpose. Because actual use of the products the user is beyond the control of SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates, such use is in the exclusive responsibility of the user. SABIC INNOVATIVE PLASTICS HOLDING BV, its subsidiaries and affiliates cannot be held responsible respectively liable for any loss incurred through incorrect or faulty use of the products. Information, recommendations and/or advice are neither made to infringe on any patents, nor to grant a license under any patent or intellectual property right of SABIC INNOVATIVE PLASTICS HOLDING BV or any of its subsidiaries or affiliated companies, nor to grant the right to file for any patent protection

* Lexan is a trademark of SABIC Innovative Plastics IP BV

© 1997-2011 SABIC Innovative Plastics Holding BV. All rights reserved